

Profile wrapping

- Innovative adhesive systems for highest quality
- Adhesives - tailored for your processes
- High performance adhesives with modern polymer technology



Jowatherm® 291.60
Jowat-Toptherm® 236.50
Jowat-Toptherm® 236.70
Jowatherm-Reaktant® 605.20

Profile wrapping with hot melt adhesives



Wrapped profiles are today accepted as standard components in the manufacture of modern furniture and building interiors. Whether as furniture decor, baseboards or cornice rails, drawer frames, wall and ceiling panels, doorframes and other profiles of any kind — profile wrapping on the most diverse base substrates is a hot topic today, and wrapping materials can be chosen from an almost endless variety of foils, papers or veneers.

The materials for the basic profiles may differ widely. They range from solid wood, over wood-based substrates, to plastics, and increasingly, aluminium and metal profiles are wrapped.

The technology for applying the adhesives is also progressing continuously. The preferred technology is currently the application by width-adjustable slot nozzles. The feed speeds have sometimes multiplied over the past years, and today, modern lines can reach up to 100 m/min.

New application technologies and faster processes require adhesive systems that meet the special requirements concerning rheology and initial strength. Jowat is meeting these demands by supplying a wide variety of suitable hot melt adhesives.

An established product is **Jowatherm® 291.60** – an unfilled EVA system for wrapping with decor paper foils. This adhesive has already very successfully used in the field for conventional roller applicators, but also on slot nozzle lines, and is also characterised by a wide spectrum of adhesion.

In addition to the tried and proven polyolefin adhesives from the **Jowat-Hightherm®** series, Jowat has developed high-performance adhesives based on a modern polymer technology - the polyolefin-based **Jowat-Toptherm®** family.

These products are first rate wrapping adhesives for very different materials, and are especially outstanding due to their high heat resistance which may surpass 110 °C. The excellent thermal stability in the melt and the low grammages allow a smooth and efficient application.

Jowat-Toptherm® 236.70 has become the standard product for wrapping with decor paper foils, thermo-plastic foils and veneer.

The highest quality demands are met by hot melts from the **Jowatherm-Reaktant®** group. They have excellent characteristics for wrapping with very diverse, difficult to bond materials at low adhesive application temperatures, and the end products will exhibit superior heat and moisture resistance levels. When the application is made by slot nozzle, this will allow very reduced grammages.

Apart from these standard adhesives, numerous special products are available which have been optimised for the most different wrapping technologies. Talks to us, we will find the optimum solution for you.

Jowatherm® 291.60

Standard product for wrapping profiles made of solid wood, particleboard and medium-density fibreboard, with resinated decor paper foils and thermoplastic foils (with the corresponding reverse primer coating).

Polymer basis		EVA
Viscosity at 180 °C	[mPas]	approx. 10,000
Density	[g/cm³]	approx. 0.95
Processing temperature	[°C]	170 - 190
Feed speed	[m/min]	20 - 80
Softening range (Kofler bench)	[°C]	approx. 85
Supply form		granulate



Jowat-Toptherm® 236.50

Standard product for wrapping profiles made of solid wood, particleboard and medium-density fibreboard, with resinated decor paper foils and thermoplastic foils (with the corresponding reverse primer coating).

Polymer basis		PO
Viscosity at 190 °C	[mPas]	approx. 9,000
Density	[g/cm³]	approx. 0.87
Processing temperature	[°C]	180 - 200
Feed speed	[m/min]	10 - 80
Softening range (Kofler bench)	[°C]	approx. 110
Supply form		granulate



Jowat-Toptherm® 236.70

Basic product for wrapping profiles made of solid wood, particleboard and medium-density fibreboard, with resinated decor paper foils, thermoplastic foils (with the corresponding reverse primer coating), CPL and veneers.

Polymer basis		PO
Viscosity at 190 °C	[mPas]	approx. 26,000
Density	[g/cm³]	approx. 0.89
Processing temperature	[°C]	180 - 200
Feed speed	[m/min]	15 - 80
Softening range (Kofler bench)	[°C]	approx. 110
Supply form		granulate



Jowatherm-Reaktant® 605.20


Basic product for wrapping profiles made of solid wood, particleboard and medium-density fibreboard, with resinated decor paper foils, thermoplastic foils (with the corresponding reverse primer coating), CPL and veneers.

Polymer basis		PUR
Viscosity at 140 °C	[mPas]	approx. 33,000
Density	[g/cm³]	approx. 1.11
Processing temperature	[°C]	approx. 140
Appearance		white opaque



Note: The products listed only represent a limited selection of the available product portfolio. Our service and consultation team from Sales and Product Marketing will be pleased to provide specific information, to select the product suitable for your process.

Jowat | Ihr Partner in Sachen Kleben
Jowat | Your Partner in bonding

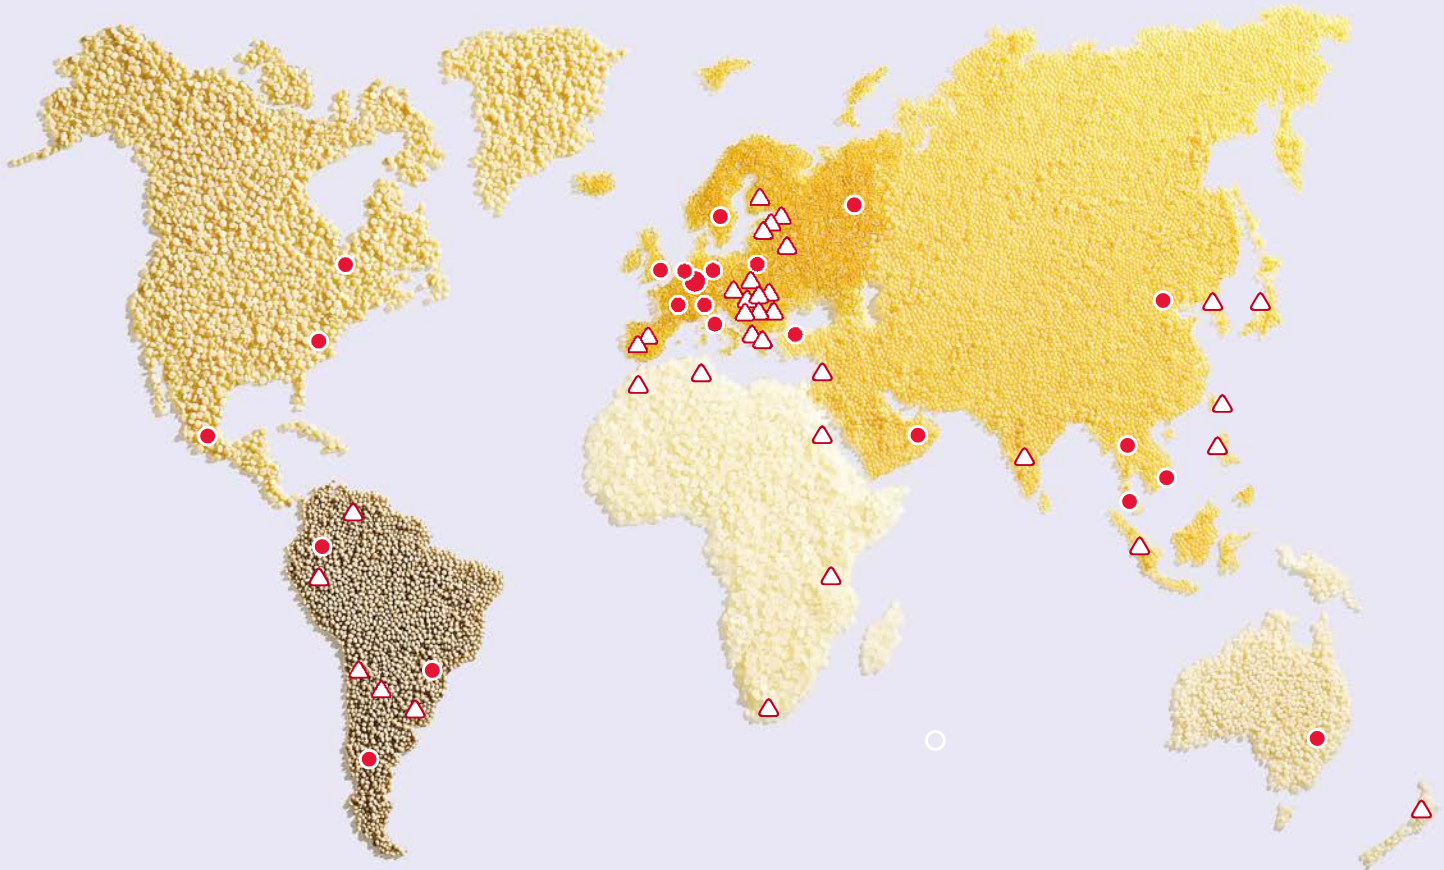

- Jowat Tochtergesellschaften / Jowat Subsidiaries
- △ Distributionspartner / Distribution Partners



The information given in this leaflet is based on test results from our laboratories as well as on experience gained in the field, and does in no way constitute any guarantee of properties. Due to the wide range of different applications, substrates, and processing methods beyond our control, no liability may be derived from these indications nor from the information provided by our free technical advisory service. Before processing, please request the corresponding data sheet and observe the information in it! Customer trials under everyday conditions, testing for suitability at normal processing conditions, and appropriate fit-for-purpose testing are absolutely necessary. For the specifications as well as further information, please refer to the latest technical data sheets.

Jowat – Kleben erster Klasse
Jowat – first class bonding

www.jowat.com



Australia Brasil Canada Chile 中国 Colombia Deutschland France Italia Malaysia Mexico Nederland Polska Россия
 Sverige Suisse ประเทศไทย Türkiye United Kingdom United States of America الإمارات العربية المتحدة Việt Nam

Tel: 01 – 885 00 00

www.ect.ie

info@ect.ie