



Jowatherm® 280.58



Excellent thermal stability

For application by roller and nozzle

High initial strength, good heat resistance

“Zero-bondline,” even on dark decors

Stringing-free, clean application

Excellent bond strength

Jowat
Klebstoffe 

Over the last years, the edgebanding hot melt **Jowatherm® 280.50** has become an established all-rounder on the market. The adhesive is renowned for good-natured processing characteristics and excellent bond strength. The white colour version **Jowatherm® 280.50** is especially suitable for bonding white edgebands on white decor materials. This provides superior bondings – the optical zero-bondline achieved with a classic hot melt based on EVA (ethylene vinyl acetate).




Now, Jowat rounds off this product group with **Jowatherm® 280.58**, a colourless, opaque version. **Jowatherm® 280.58** is transparent and crystal clear in the melt, and provides colourless, opaque bondlines. Therefore, it is perfect for dark decors or combinations of different decor materials.



Jowatherm® 280.50/.51/.58

Allrounder, for straight edgebanding, softforming and BAZ. For bonding e.g. thermoplastic edgebands and edgebands made of HPL, CPL, resinated paper, solid wood or veneer.

	Jowatherm® 280.50/.51	Jowatherm® 280.58
Polymer basis	EVA	EVA
Processing temperature [°C]	approx. 180 - 200	approx. 180 - 200
Density [g/cm³]	approx. 1.1	approx. 1.0
Viscosity at 200 °C [mPas]	approx. 80,000	approx. 80,000
Softening range [°C]	approx. 95 (Kofler bench)	approx. 95 (Kofler bench)
Appearance	light beige, white	colourless opaque
Supply form	granulate	granulate

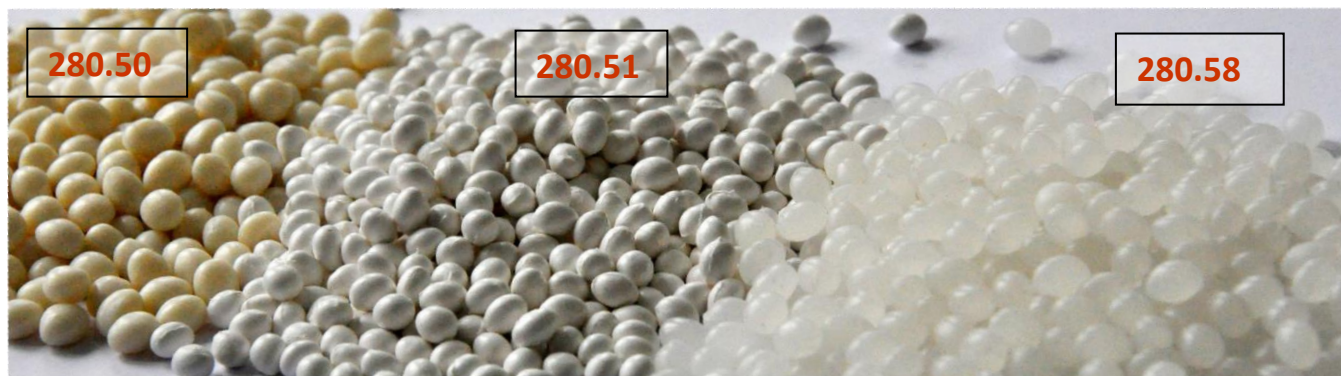

First class bonding

Jowat 
Klebstoffe

Jowat SE · Ernst-Hilker-Str. 10 - 14 · 32758 Detmold · Telefon: +49 (0)5231 749-0 · Telefax: +49 (0)5231 749105 · info@jowat.de · www.jowat.de