


**TUSKBOND**  
**Woodwork**  
**& Joinery**  
**Range**

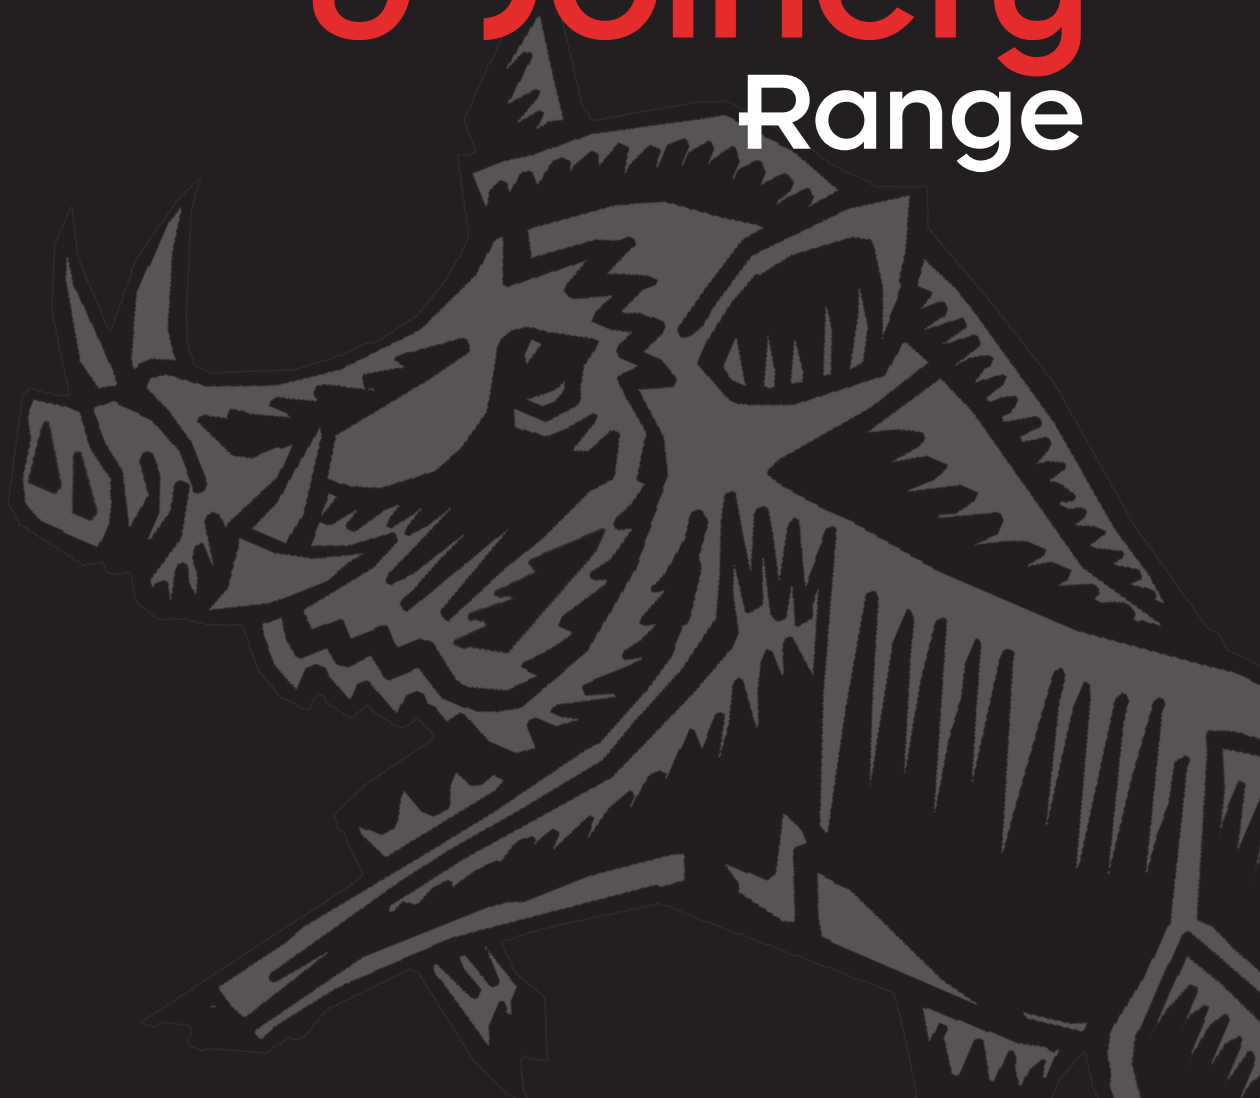

# Professional spray adhesives for **Woodwork & Joinery.**


**Tuskbond** has worked closely within the Woodwork & Joinery market to develop a range of cutting-edge adhesives, perfectly attuned to the needs of the customer. Based on years of development, we offer adhesives for a wide range of materials and types of Woodwork & Joinery processes. The unique quality of our products is that we develop and manufacture our own adhesives for the full Woodwork & Joinery range, allowing us complete control over the performance and quality.

Our products have been used successfully in this market for years. The **Tuskbond** range is built on the principle of quality and consistency. All of our products offer genuine high-quality solutions, to real industry problems. The nature of **Tuskbond** leads to improved efficiency within the markets that the products are used.



# How it Works

When the spray adhesive canister was first conceived, its very essence was to make a once laborious and time-consuming task simple. This essence remains true - simply connect the gun and hose to the canister, release the valve and spray!

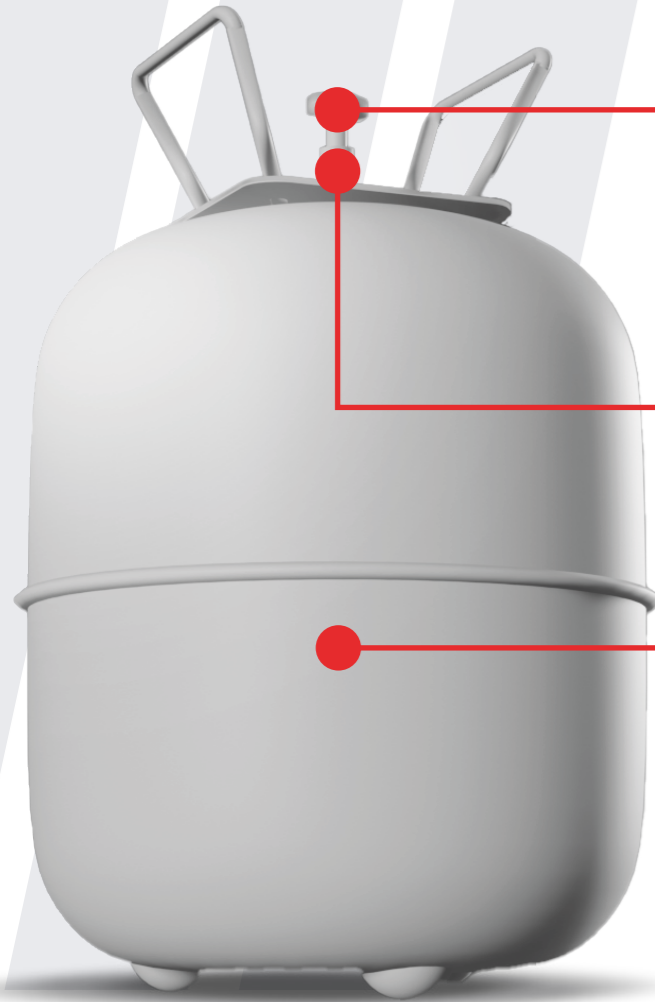

## Canister Valve

This valve is used to control the flow of adhesive out of the canister. Once opened, the pressurised system propels outwards. It is vital that the gun and hose are securely connected before opening the pressure release valve.

## Hose Connection Point

The point where the canister and hose meet to create a safe and secure connection.

## Canister Contents

A mixture of carefully formulated ingredients to create an adhesive designed to meet specification, coupled with pressurised propellant gas.

## Setup: Tips & Advice

**Tuskbond** canister spray equipment is hard wearing and designed to last. With regular maintenance and cleaning, the gun and hose can be used over and over again. Taking a few easy steps can help prevent blockages and keep your canisters working.

**Tuskbond** Spray Guns have a brass spray tip that helps give the product the perfect spray pattern. Be sure to regularly clear the tip of adhesive, particularly after use. This will prevent build-up of adhesive, which can restrict the spray and result in blockages or poor spray patterns.

Once you have finished using your canister, do not turn it off at the main tap (this can cause the adhesive to solidify and block the hose). Instead, lock off the gun using the trigger restrictor. If the canister is going to be left for longer than a few days without use, consider buying a Canister Cleaning Kit. The kit is designed to flush the gun and hose assembly with cleaning solvent, allowing both to be removed without risking blockages.

**For more information on this, visit our YouTube channel.**

# Accessories

## Professional Spray Gun



- Strong aluminium alloy body
- Durable
- Accommodates all interchangeable Unijet spray tips
- Includes 9501 spray tip

## Economy Spray Gun



- Durable lightweight construction
- Accommodates all interchangeable Unijet spray tips
- Includes 9501 spray tip

## Hose



- Highly flexible hose
- Lightweight, durable nylon core with synthetic rubber coating
- Fits easily and securely to any **Tuskbond** canister and application gun
- Durable for repeated use

## Braided Hose



- Required for Use With Sprayable PU
- Moisture Resistant, PTFE Lined
- Durable

## Trigger Gun



- Designed to fit on to the top of all Aerosols
- Effortless and efficient Spray

## Cleaning Kit & Adaptor



- Cleans without needing another canister
- Extends lifespan of gun and hose
- Easy way to clean adhesive and overspray
- Prevents blockages

The **Canister Cleaning Kit** is specially designed to simplify the process of cleaning out products from canister guns and hoses after use, to prevent blockages. The assembly is easy and efficient to use.

**Tuskbond GC22** is designed to be used with the **Tuskbond Canister Cleaning Assembly** to give a simple, fast and convenient method of cleaning canister guns and hoses, preventing blockages whilst also prolonging the lifespan of the system.

# TUSKBOND ONE

## Sprayable Contact Adhesives

**Ideal for:** decorative laminates, high pressure laminate, timber core, metals and certain plastics



### ONE

#### Web Spray Contact Adhesive

- Instant, strong bonds
- Fast drying
- Low odour

##### Coverage

22L	128m <sup>2</sup>
500mL	2.5m <sup>2</sup>
110L	640m <sup>2</sup>

##### Tech Data

Colour	Colourless or Red
Spray Pattern	Web
Solids Content	28%
Drying Time	1-2 mins
Open Time	60 mins
Heat Resistance	100°C



### ONE FR

#### Fire Rated Contact Adhesive

- Fire rated
- Heat Tested to 100°C
- Fast drying

##### Coverage

22L	128m <sup>2</sup>
500mL	2.5m <sup>2</sup>
110L	640m <sup>2</sup>

##### Tech Data

Colour	Colourless or Red
Spray Pattern	Web
Solids Content	28%
Drying Time	1-2 mins
Open Time	60 mins
Heat Resistance	100°C
Fire Rating	BS476 - Part 6+7



### ONE GOLD

#### High Solids Contact Adhesive

- Heavier adhesive coat
- Increased coverage
- Stronger bonds

##### Coverage

22L	150m <sup>2</sup>
500mL	3.5m <sup>2</sup>
110L	750m <sup>2</sup>

##### Tech Data

Colour	Colourless or Red
Spray Pattern	Web
Solids Content	35%
Drying Time	1-2 mins
Open Time	60 mins
Heat Resistance	105°C

# TUSKBOND XPRO

## Next Generation Contact Adhesives

**Ideal for:** decorative laminates, high pressure laminate, timber core, metals and certain plastics



### XPRO

The Next Generation of Contact Adhesive

- Innovative solvent technology
- Safer formulation
- Instant strong bonds

#### Coverage

22L	100m <sup>2</sup>
500mL	2.2m <sup>2</sup>
110L	500m <sup>2</sup>

#### Tech Data

Colour	Colourless
Spray Pattern	Web
Solids Content	28%
Drying Time	1 - 2 mins
Open Time	60 mins
Heat Resistance	100°C



### XPRO FR

Non-chlorinated, Fire Rated Contact Adhesive

- Fire rated
- Safer formulation
- Innovative solvent technology

#### Coverage

22L	100m <sup>2</sup>
500mL	2.2m <sup>2</sup>
110L	500m <sup>2</sup>

#### Tech Data

Colour	Colourless
Spray Pattern	Web
Solids Content	28%
Drying Time	1 - 2 mins
Open Time	60 mins
Heat Resistance	100°C
Fire Rating	BS476 - Part 6+7



### XPRO GOLD

High Solids, Non-chlorinated Contact Adhesive

- Heavier adhesive coat
- Innovative solvent technology
- Stronger bonds

#### Coverage

22L	110m <sup>2</sup>
500mL	3m <sup>2</sup>
110L	550m <sup>2</sup>

#### Tech Data

Colour	Colourless
Spray Pattern	Web
Solids Content	35%
Drying Time	1 - 2 mins
Open Time	60 mins
Heat Resistance	100°C

# TUSKBOND HGL100

## Mist Spray Contact Adhesives

**Ideal for:** high gloss laminates, very thin laminates, and timber core



### HGL100

#### Mist Spray Contact Adhesive

- Flat glue line eliminates telegraphing
- Fast drying
- Perfect for high gloss laminates

##### Coverage

22L	105m <sup>2</sup>
500mL	2.2m <sup>2</sup>
110L	525m <sup>2</sup>

##### Tech Data

Colour	Colourless
Spray Pattern	Mist
Solids Content	28%
Drying Time	2-3 mins
Open Time	60 mins
Heat Resistance	60°C



### HGL100 FR

#### Fire Rated Mist Spray Contact Adhesive

- Fire rated
- Flat glue line, eliminates telegraphing
- Perfect for high gloss laminates

##### Coverage

22L	150m <sup>2</sup>
500mL	3m <sup>2</sup>
110L	750m <sup>2</sup>

##### Tech Data

Colour	Colourless
Spray Pattern	Mist
Solids Content	28%
Drying Time	3-5 mins
Open Time	30 mins
Heat Resistance	100°C
Fire Rating	BS476 - Part 6+7

# TUSKBOND HH550

## Flexible Spray Contact Adhesive

**Ideal for:** thick laminates, solid surface, timber core, timber build ups, flexi-ply

### HH550

#### Flexible Contact Adhesive

- Flexible glue line allows for movement
- Fast drying
- High heat resistance
- Approved for use with Hanex Solid Surfaces

#### Coverage

22L	128m <sup>2</sup>
500mL	2.5m <sup>2</sup>
110L	640m <sup>2</sup>

#### Tech Data

Colour	Colourless or Red
Spray Pattern	Web
Solids Content	28%
Drying Time	2 - 3 mins
Open Time	60 mins
Heat Resistance	105°C



# TUSKBOND PU-01

## Web Spray Polyurethane

**Ideal for:** vinyl, rubber, plastics, laminates

### PU-01

#### Web Spray Polyurethane Adhesive

- Waterproof bond
- Plasticiser migration resistant
- Very high heat resistance

#### Coverage

22L	200m <sup>2</sup>
500mL	N/A
110L	N/A

#### Tech Data

Colour	Clear
Spray Pattern	Web
Solids Content	60%
Drying Time	3-5 mins
Open Time	20-25 mins
Heat Resistance	>120°C



# CITRUS CLEANER

## Sprayable cleaner

**Ideal for:** cleaning adhesive residue and other contaminants



## Citrus Cleaner

**Sprayable adhesive cleaner**

- Removes adhesive fast
- Citrus scented
- Fast Drying



## ZERO

**100% Non-flammable system**



## WATER

**Water-based adhesive**





# TUSKBOND

## Starter Kit



**Tuskbond** Starter Kit  
includes:

- Professional spray gun
- Spray tip
- Rubber hose
- Aerosol trigger

# TUSKBOND

[www.tuskbond.uk](http://www.tuskbond.uk)

**Tuskbond Adhesive Products**

**c/o Sanglier Limited**

Shelley Close  
Lowmoor Business Park  
Kirkby in Ashfield  
NG17 7JZ  
United Kingdom

01623722661

[info@tuskbond.co.uk](mailto:info@tuskbond.co.uk)

© Tuskbond 2023

# TUSKBOND

[www.tuskbond.uk](http://www.tuskbond.uk)

**Tuskbond Adhesive Products**

**c/o Sanglier Limited**

Shelley Close  
Lowmoor Business Park  
Kirkby in Ashfield  
NG17 7JZ  
United Kingdom

01623722661

[info@tuskbond.co.uk](mailto:info@tuskbond.co.uk)