

## »Next Gen« Buffing

**U**pgrade for your existing buffing unit. With a precisely matched brush combination and the use of the special liquid **TF25**, contaminants in the joint area are removed while previously applied, process-relevant fluids are absorbed. Both flat and deeply textured surfaces - as well as matte to high-gloss décors - are gently and effectively cleaned in the process.

**Texture Finish** consists of the special liquid **TF25** applied with a spraying system and a brush combination. The brushes remove adhesive residues in the joint area while the liquid prevents the adhesive from sticking to the workpiece and keeps the brushes free of dirt.

Generally, retrofitting is possible without any problems, as the space required for the spraying system is approx. 50-80 mm, depending on the installation situation. To install the brush set, only the existing buffing wheels need to be replaced. This design means that the system can be retrofitted to almost all edge banding machines.



„Residue-free edge finishing with great value“


Continue here



## TOP COVER

For a specific spray pattern

- Distributes the fluid evenly across the glue joint and the edge band radius.
- Thanks to the integrated 5-degree spray angle, the chain plate remains free of contamination.

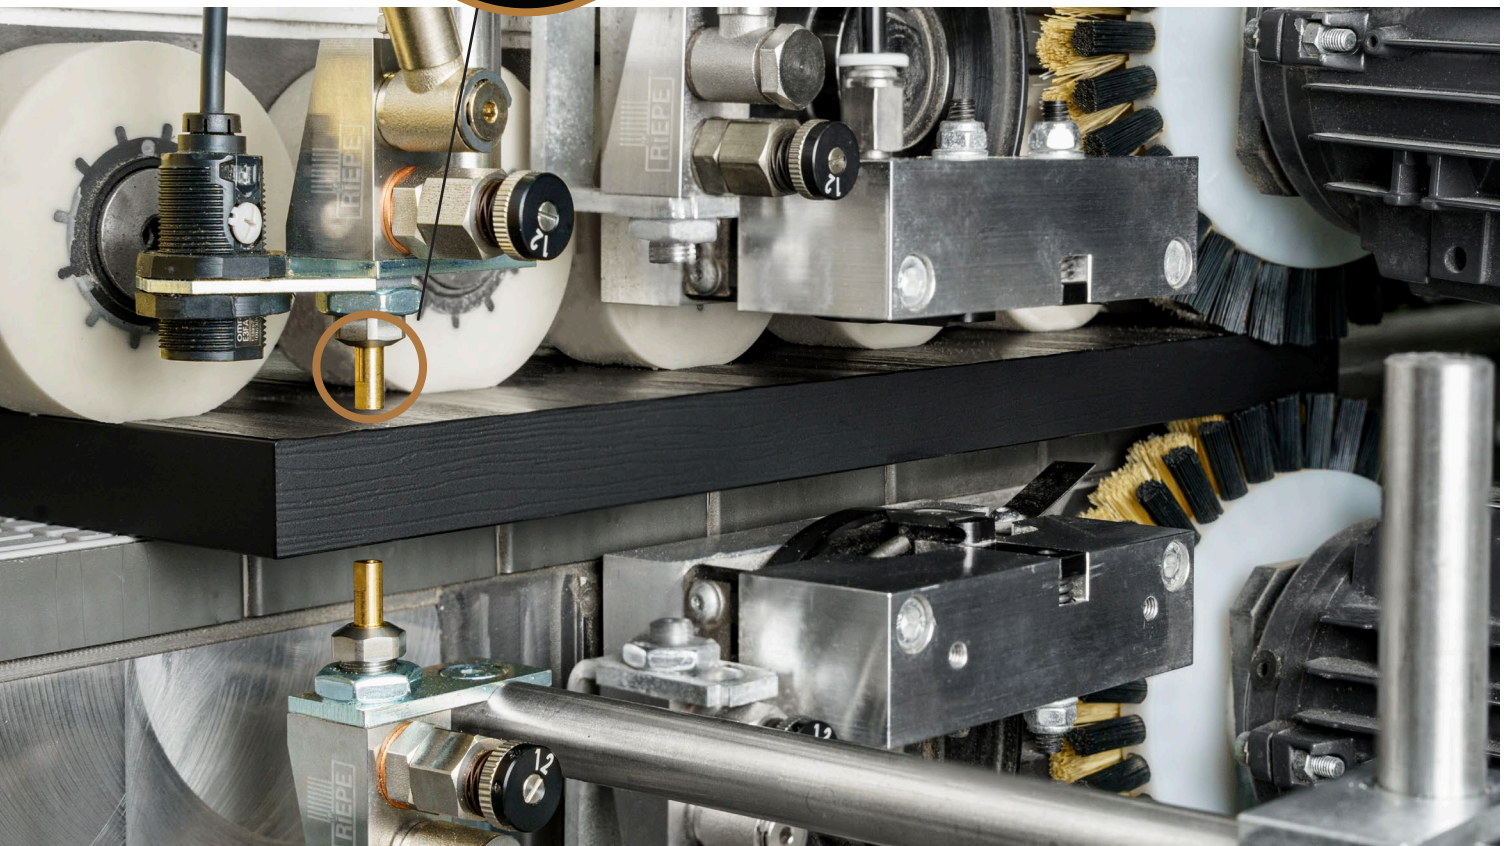

### Scope of delivery:

- Brush set, consisting of a combination of polyamide and fibre
- Spraying system incl. control unit (24V or 230V) and photo sensor
- Liquid Container filled with TF/25, connection set and matching holder
- **Available dimensions:**
  - 160x24x50mm and 120x24x50mm

*Can be attached to almost any motor with the RIEPE® universal adapter*